EIZO®

Professional LCD Monitors

FlexScan®

FlexScan Monitors — Simply Made Better

◀ On-site anechoic chamber where we test our monitors to ensure compliance with international EMC (electromagnetic compatibility) regulations.

▶ EIZO engineer at work.

▼ Each monitor is individually inspected on the assembly line before shipping.

▲ Our quality control process includes long-life testing where monitors are left powered on for tens of thousands of hours.

▼ A CCD (charge coupled device) camera checks and adjusts the monitor's color temperature, gamma, white balance, and brightness.

The craftsmanship that goes into our FlexScan monitors makes them the monitor of choice for back offices, trading floors, SOHO, CAD, graphic design and digital photography. It is the core of our specialized lines as well, including RadiForce medical monitors and ColorEdge color management monitors.

What is the secret behind the renowned quality of EIZO FlexScan monitors? It's simple, really — we build them ourselves. By designing, manufacturing, and testing our products in-house, we can develop products with the specific features our customers need, and bring them to market when they need them.

To incorporate the latest technologies in our products and ensure they are enjoyable to use, we invest heavily in R&D. At our corporate headquarters in Japan we have a newly-built R&D center. Here, all the engineers who develop FlexScan products are in one location, allowing for improved efficiency and reduced development times.

Achieving the optimum product quality ultimately relies on manufacturing. Our process starts with our people. We train and test them for every task, whether veteran or newcomer, to ensure the job is done right.

Their careful attention to detail on the assembly line is instrumental in improving our manufacturing and maintaining our high level of quality.

So now that the secret is out, why not experience a FlexScan monitor for yourself, and find out why nothing else even comes close?

EV Series

Minimize your running costs while bringing EIZO's most ecological and ergonomic features to your office or trading floor. These widescreen monitors feature a lightweight compact design, LED backlights, and extremely low power consumption when in normal operation.

Models

EV2335W,
EV2315W

Key Features

- 23" screens with 16:9 aspect ratio.
- Auto EcoView and EcoView Optimizer for optimal screen brightness.
- EcoView Index to encourage environmental consciousness while working.
- Paper mode and EyeCare Filter simulate the look of paper for comfortable reading of documents and ebooks.
- LED backlight lowers power consumption to just 16 watts during normal use and is mercury free.

SX Series

SX series monitors come with technology for superb picture quality, making them the high-end choice for graphic design, video editing, 3-D CAD, and digital photography.

Models

SX2762W, SX2462W,
SX2262W

Key Features

- 27", 24.1", and 22" screens with 16:10 or 16:9 aspect ratio.
- Wide color gamut that covers 95% or more of the Adobe RGB color space.
- Fast gray-to-gray response times of 6 ms or less.
- 16-bit look-up table for smooth display of even the darkest grayscale tones.
- Digital Uniformity Equalizer (DUE) for improved brightness uniformity.

Without DUE: uneven brightness distribution

With DUE: uniform brightness across the screen

S Series Widescreen

These energy-saving and ergonomic monitors are available with VA or TN panel technology. Designed primarily for business use, they are also ideal for CAD and amateur digital photography.

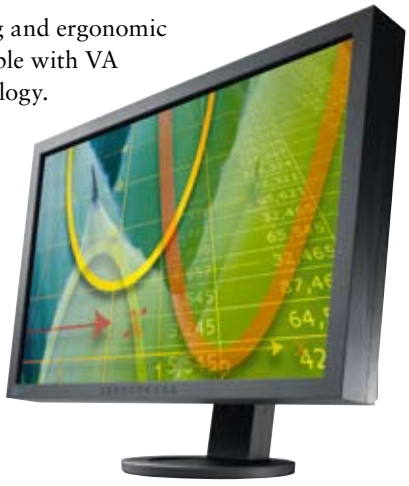

Models

S2433W, S2402W,
S2243W, S2233W,
S2202W

Key Features

- 24.1" and 22" screens with 16:10 aspect ratio.
- Auto EcoView for optimal screen brightness in any ambient lighting environment.
- EcoView Index to encourage environmental consciousness while working.
- FlexStand with up to 174 mm height adjustment, tilt, swivel, and pivot.*
- Unobtrusive, 0.5-watt speakers built into the back of the cabinet.

Speakers are hidden away in the back of the monitor to minimize bezel size.

**S2202W comes with 100 mm height adjustable stand.*

S Series Standard

The ideal choice for those who prefer a standard (5:4 or 4:3) aspect ratio. The ergonomic and ecological features reduce eyestrain and power consumption for back offices, trading floors, government facilities, and homes.

Models

S2100, S1932, S1921-X, S1902, S1721-X, S1701-X, S1501-B

Key Features

- 19", 17", and 15" screens with 5:4 or 4:3 aspect ratio.
- Auto EcoView for optimal screen brightness in any ambient lighting environment.
- EcoView Index to encourage environmental consciousness while working.*
- Paper mode that simulates the look of paper for comfortable reading of documents and ebooks.*
- Stand with 82 mm or more of height adjustment, tilt, swivel, and pivot.*

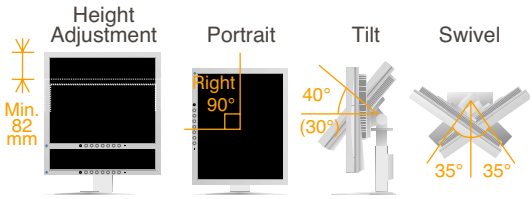

**S2100 and S1501-B do not come with Paper mode and EcoView Index. S2100 does not include speakers and S1501-B does not come with a height adjustable stand.*

Touch Panels

The convenience of touch panel monitors makes them a practical choice for hospitals, factories, reception areas, and retail shops. Finger touch is standard, with pen touch available when using the optional TP1 dedicated touch pen.

Models

L761T-C, L760T-C, L560T-CB, T1721, L363T-C, L362T, T1502-B, T1501-B

Key Features

- 19", 17", and 15" screens with 5:4 or 4:3 aspect ratio.
- High optical clarity, fast touch response, and long touch life.
- Touch interface through an RS232C serial port or a USB port.*
- Brightness, saturation, gain, and color temperature adjustments in OSD menu.
- EIZO-patented drift correction to quickly stabilize brightness at startup or upon wakeup.



**L560T-CB available with USB port only.*

Multitouch

This intuitive touch interface lets you do more at once by flicking, spinning, stretching, or shrinking. These multitouch monitors are ideal for classrooms, libraries, and offices. The T2351W is also suitable for gaming and watching movies.

Models

T2351W, T1751

Key Features

- 23" and 17" screens with 16:9 or 5:4 aspect ratio.
- LaidBack stand which can be positioned nearly upright or tilted back for ease of use.
- Accepts input from a bare hand, gloved hand, pen, or pointer.
- Tempered glass for high touch durability.
- Multitouch interface with infrared optical imaging technology and Windows 7 compatibility.

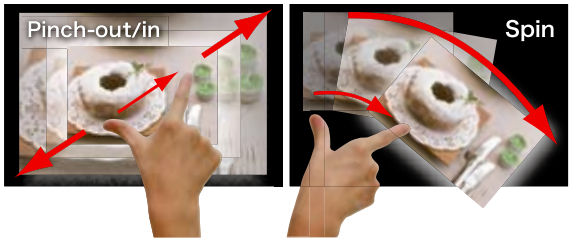

"EcoView" embodies EIZO's concept of combining ergonomic and environmental features for an economical result. Monitors with EcoView features deliver increased comfort, reduced environmental burden, and ultimately lower running costs.

Ergonomics

Clear View from Different Angles

Many FlexScan models have 178° viewing angles so they exhibit minimal change in contrast and hue when viewed from off center, making them ideal for a multi-monitor setup.

The FlexScan EV2315W has 170° horizontal and 160° vertical viewing angles. It comes with an "Up View" function which minimizes the washing out of colors for improved visibility in environments where the user must look up to see the screen.

Panel with narrow viewing angles

IPS panel

Up View Off

Up View On

Paper Mode and EyeCare Filter Reduce Eye Fatigue

Designed to reduce eye fatigue, several models include Paper mode which simulates the look of printed paper and helps prevent eyestrain when reading documents. What's more, a new feature called EyeCare Filter, available with the EV series, comes with several filter patters that resemble different types of paper.

Choice of filter patterns

sRGB Mode

Paper Mode

Paper Mode with EyeCare Filter

Versatile Positioning

Available with all EV, SX, and most S series widescreen models, EIZO's highly versatile FlexStand (shown below) offers tilt, swivel, portrait rotation, and height adjustment. Most S series standard and several touch panel models come with a stand that offers up to 100 mm of height adjustment as well as tilt, swivel, and portrait mode.

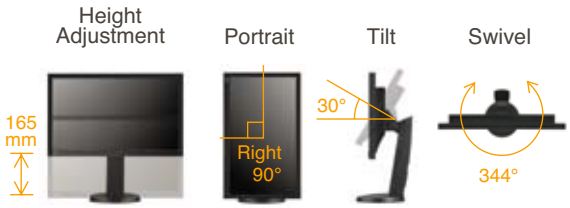

Adjustable to Just 1% of Maximum Brightness

In a dimly-lit work environment, a monitor with low brightness settings will be more comfortable to use. The EV series comes with LED backlights that allow for adjusting the brightness to just 1% (about 3 cd/m^2) of the maximum. With typical CCFL backlights the lowest you could adjust to would be a much brighter 20%.

3 cd/m^2 (1% brightness)

250 cd/m^2 (100% brightness)

EyeCare Manager

EIZO's EyeCare Manager, available with the bundled ScreenManager Pro software, prompts workers to take scheduled breaks to avoid eye fatigue caused by prolonged monitor use. EyeCare also totals and displays on-screen the monitors' usage hours for each day and month to promote worker awareness of how much time they spend in front of their monitors.

EyeCare reminds workers to take regular breaks to prevent eye fatigue.

Environment

=

Economy

Environmentally-Friendly LED Backlight

EV series models come with an LED backlight which contains no mercury. The backlight also provides significant power savings compared to conventional CCFL backlights, requiring just 16 watts during normal use and less than 0.1 watts in power-save mode.

Optimized Brightness

Two original EIZO features are included for optimal screen brightness. Auto EcoView measures the ambient light and automatically adjusts the screen's brightness accordingly. A new function available with the EV series called EcoView Optimizer fine-tunes these changes by further adjusting the screen's brightness depending on the kind of content being displayed. Together, these two features trim power usage by up to 54% while reducing eye fatigue.

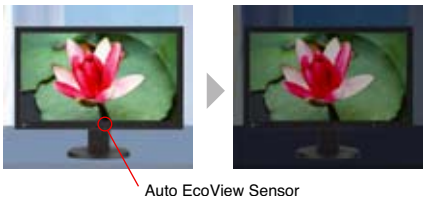

Recycled Plastic

The front and rear cabinets as well as the front buttons of the EV series are partially made of recycled plastic.

Improved Work Efficiency, Reduced Visual Fatigue

EIZO conducted a survey to establish the relationship between eye fatigue and monitor use. The results showed that features like Auto EcoView and ergonomic stands helped reduce eye fatigue and improved work efficiency by 12.5%.

Increases in Quantity of Monitor Work

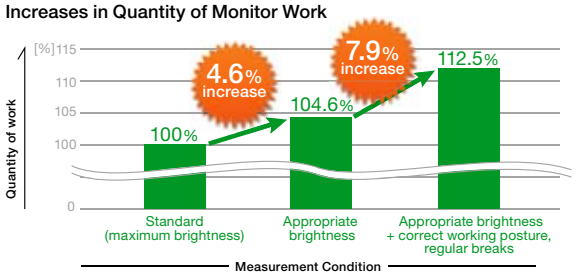

Lower Power Consumption for Greater Savings

Auto EcoView cuts power consumption by up to 54% compared to operating the monitor at the default brightness of 100%.

Model*	Auto EcoView OFF	Auto EcoView ON	Power Reduction
FlexScan EV2335W	35 W	16 W	54%
FlexScan EV2315W	31 W	16 W	48%
FlexScan S2433W	71 W	40 W	43%
FlexScan S2243W	69 W	36 W	47%
FlexScan S2233W	66 W	32 W	51%

**Auto EcoView is available with other models than those listed above.*

5-Year Manufacturer's Limited Warranty

EIZO backs these monitors with a 5-year warranty. This makes them an investment that pays off over time.

5 Year Warranty

Power Management Software

EIZO EcoView NET software allows your organization to reduce its electric bills while minimizing its burden on the environment by centralizing control over the power settings of monitors on a network. For EIZO monitors that support DDC/CI, you can adjust the brightness, turn the Auto EcoView function on and off, and lock the control buttons to prevent tampering with screen settings. You can also switch a PC's primary power and a monitor's secondary power on and off regardless of the manufacturer.

EcoView NET summarizes and displays how much power is saved for each monitor as a result of using it over a specified period of time. It is compatible with Windows 7, Vista, and XP, and is available free of charge. Please see www.eizo.com for details.

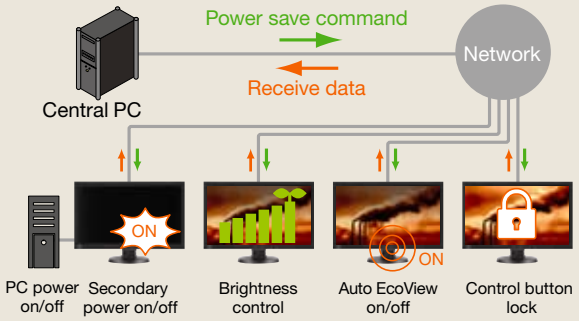

SPECIFICATIONS

		FlexScan® EV2335W	FlexScan® EV2315W	FlexScan® SX2762W	FlexScan® SX2462W
Panel	**Size**	23" / 58 cm (584 mm diagonal)	23" / 58 cm (584 mm diagonal)	27" / 68 cm (684 mm diagonal)	24.1" / 61 cm (611 mm diagonal)
	Display Size (H × V)	509.8 × 286.7 mm	509.8 × 286.7 mm	596.7 × 335.6 mm	518.4 × 324 mm
	Type	IPS (with overdrive circuit)	TN	IPS (with overdrive circuit)	IPS (with overdrive circuit)
	Viewing Angles (H, V)	178°, 178° (at contrast ratio of 10:1)	170°, 160° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)
	Brightness	250 cd/m^2	250 cd/m^2	270 cd/m^2	270 cd/m^2
	Contrast Ratio	1000:1	1000:1	850:1	850:1
	Response Time (Typical)	Gray-to-gray: 6 ms, black-white-black: 16 ms	Black-white-black: 5 ms	Gray-to-gray: 6 ms, black-white-black: 12 ms	Gray-to-gray: 5 ms, black-white-black: 13 ms
	Native Resolution	1920 × 1080 (16: 9 aspect ratio)	1920 × 1080 (16: 9 aspect ratio)	2560 × 1440 (16:9 aspect ratio)	1920 × 1200 (16:10 aspect ratio)
	Pixel Pitch	0.2655 × 0.2655 mm	0.2655 × 0.2655 mm	0.2331 × 0.2331 mm	0.270 × 0.270 mm
	Maximum Display Colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	10-bit display[3], 1.07 billion colors	DVI: 8-bit display, 16.77 million colors DisplayPort: 10-bit display[3], 1.07 billion colors
	Wide Gamut Coverage	–	–	Adobe RGB: 97%, 102% vs. NTSC	Adobe RGB: 98%, 102% vs. NTSC
Video and USB	**D-Sub mini 15 pin**	•	•	–	–
	DVI-D 24 pin	• (with HDCP support)	• (with HDCP support)	•	–
	DVI-I 29 pin	–	–	–	• (2 connectors with HDCP support)
	DisplayPort	• (with HDCP support)	–	• (with HDCP support)	• (with HDCP support)
	Mini DisplayPort	–	–	• (with HDCP support)	–
	Analog Scan. Freq. (H, V)	31 – 81 kHz, 55 – 76 Hz	31 – 68 kHz, 55 – 61 Hz	–	31 – 76 kHz, 49 – 86 Hz
	Digital Scan. Freq. (H, V)	31 – 68 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 68 kHz, 59 – 61 Hz	26 – 89 kHz, 23.75 – 63 Hz (VGA Text: 69 – 71 Hz)	31 – 76 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)
	USB Ports / Standard	–	–	1 upstream, 2 downstream / USB 2.0	1 upstream, 2 downstream / USB 2.0
Audio	**Speakers**	0.5 W speaker	0.5 W speaker	–	–
	Input / Output Terminals	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	–	–
Power	**Power Requirements**	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
	Power Consumption	16 W (typical), 35 W (maximum)	16 W (typical), 31 W (maximum)	64 W (typical), 160 W (maximum)	48 W (typical), 95 W (maximum)
	Power Save Mode	Less than 0.1 W	Less than 0.1 W	Less than 1 W	Less than 0.9 W
Physical Specifications	**Height Adj. Range**	165 mm	165 mm	151.5 mm	157 mm
	Tilt / Swivel / Pivot	With Stand: 30° Up, 0° Down / 172° Right, 172° Left / 90°	With Stand: 30° Up, 0° Down / 172° Right, 172° Left / 90°	25° Up, 0° Down / 172° Right, 172° Left / 90°	30° Up, 0° Down / 172° Right, 172° Left / 90°
	Dimensions	With Stand:547 × 360 – 518 × 245.5 mm Without Stand: 547 × 334 × 63.5 mm	With Stand: 547 × 360 – 518 × 245.5 mm Without Stand: 547 × 334 × 63.5 mm	With Stand: 646 × 425 – 576.5 × 281.5 mm Without Stand: 646 × 402 × 92 mm	With Stand: 566 × 381.5 – 538.5 × 242 – 256 mm; Without Stand: 566× 367 × 85 mm
	Net Weight	With Stand: 6.7 kg, Without Stand: 4.0 kg	With Stand: 6.2 kg, Without Stand: 3.5 kg	With Stand: 13.6 kg, Without Stand: 9.7 kg	With Stand: 10.1 kg; Without Stand: 7.1 kg
EcoView Features	**Auto EcoView**	•	•	•	•
	EcoView Index	•	•	•	•
	EcoView Sense	–	–	•	–
	EcoView Optimizer	•	•	–	–
OSD Adjustment Functions	**Screen Adjustment**	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge), Smoothing (5 stages), Border Intensity	Screen Size (full screen, enlarge, normal)	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge, normal)
	Color Adjustment	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Overdrive, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Independent 6-Color Control, Gamma, Temperature, Saturation, Hue, Gain, Contrast and Outline Enhancer, Reset	Brightness, Contrast, Independent 6-Color Control, Gamma, Temperature, Saturation, Hue, Gain, Contrast and Outline Enhancer, Reset
	Power Management	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM, and DVI DMPM), Off Timer	Power Save (DisplayPort / Mini DisplayPort: Rev. 1.1a, DVI: DVI DMPM), Eco Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer
	Sound	Volume, Power Save, Source (DisplayPort)	Volume, Power Save	–	–
	Other Settings	Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Switching, Up View, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Auto Sharpness, Mode Preset, Adjustment Lock, DDC/CI Lock, Languages (English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese), Power Indicator, All Reset	Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Auto Sharpness, Mode Preset, Adjustment Lock, DDC/CI Lock, Languages (English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese), Power Indicator, All Reset
Other Features	**Preset Modes**	Fine Contrast (Paper, Movie, sRGB, User1, User2), Auto Fine Contrast[1]	Fine Contrast (Paper, Movie, sRGB, User1, User2), Auto Fine Contrast[1]	Color Mode ((Paper, Text, Picture, Movie, sRGB, User1, User2, User3), Auto Fine Contrast[1]	Color Mode (Text, Picture, Movie, sRGB, User1, User2, User3), Auto Fine Contrast[1]
	Digital Uniformity Equal.	–	–	•	•
	ScreenManager Pro for LCD	•	•	•	•
	ScreenTuner	–	–	•	•
General	**Available Cabinet Colors**	Black, Gray & Black	Black, Gray & Black	Black	Black
	Certifications and Standards	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 9241-307), TÜV/GS, C-tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 9241-307), TÜV/GS, C-tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE	CUDO certified mark, TCO'03, TÜV/Ergonomics (including ISO 9241-307 [Pixel fault class I]), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE	CUDO certified mark, TCO Displays 5.0, TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE, CCC, GOST-R
	Supplied Accessories	AC power cord, signal cables (DVI-D – DVI-D, DisplayPort – DisplayPort), audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), warranty card, setup guide	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], EIZO ScreenSlicer software), warranty card, setup guide	AC power cord, signal cable (DVI-D – DVI-D [dual link supported]), USB cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD, EIZO ScreenSlicer software), setup guide, 4 screws for mount option, warranty card	AC power cord, signal cables (DVI-D – DVI-D, DVI-I – D-Sub mini 15 pin), USB cable, setup guide, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [USB], EIZO ScreenSlicer software), warranty card
	Warranty	Five Years[2]	Five Years[2]	Five Years[2]	Five Years[2]

[1] The bundled ScreenManager Pro for LCD is needed to activate Auto Fine Contrast. The USB version is compatible with Microsoft Windows 7/Vista/XP. The DDC/Ci version is compatible with 7/Vista. [2] The usage time is limited to 30,000 hours or less, and the warranty period of the LCD panel is limited to three years from the date of purchase. [3] A graphics board and software which support 10-bit output are also necessary for 10-bit display.

FlexScan SX2262W	FlexScan S2433W	FlexScan S2402W	FlexScan S2243W	FlexScan S2233W
22" / 56 cm (558 mm diagonal)	24.1" / 61 cm (611 mm diagonal)	24.1" / 61 cm (611 mm diagonal)	22" / 56 cm (558 mm diagonal)	22" / 56 cm (558 mm diagonal)
473.8 × 296.1 mm	518.4 × 324 mm	518.4 × 324 mm	473.8 × 296.1 mm	473.8 × 296.1 mm
VA (with overdrive circuit)	VA (with overdrive circuit)	TN	VA (with overdrive circuit)	VA (with overdrive circuit)
178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)	170°, 160° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)
280 cd/m^2	360 cd/m^2	300 cd/m^2	350 cd/m^2	350 cd/m^2
1000:1	1000:1	1000:1	1200:1	1200:1
Gray-to-gray: 6 ms, black-white-black: 12 ms	Gray-to-gray: 6 ms, black-white-black: 16 ms	Gray-to-gray: – , black-white-black: 5 ms	Gray-to-gray: 6 ms, black-white-black: 12 ms	Gray-to-gray: 6 ms, black-white-black: 12 ms
1920 × 1200 (16:10 aspect ratio)	1920 × 1200 (16:10 aspect ratio)	1920 × 1200 (16:10 aspect ratio)	1920 × 1200 (16:10 aspect ratio)	1680 × 1050 (16:10 aspect ratio)
0.247 × 0.247 mm	0.270 × 0.270 mm	0.270 × 0.270 mm	0.247 × 0.247 mm	0.282 × 0.282 mm
DVI: 8-bit display, 16.77 million colors DisplayPort: 10-bit display[3], 1.07 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors
Adobe RGB: 95%, 92% vs. NTSC	Adobe RGB: 96%, 92% vs. NTSC	–	Adobe RGB: 95%, 92% vs. NTSC	Adobe RGB: 95%, 92% vs. NTSC
–	•	•	•	•
–	• (with HDCP support)	• (with HDCP support)	• (with HDCP support)	• (with HDCP support)
• (2 connectors with HDCP support)	–	–	–	–
• (with HDCP support)	• (with HDCP support)	–	• (with HDCP support)	• (with HDCP support)
–	–	–	–	–
31 – 76 kHz, 49 – 86 Hz	31 – 94 kHz, 55 – 76 Hz	31 – 94 kHz, 55 – 76 Hz	31 – 94 kHz, 55 – 76 Hz	31 – 82 kHz, 55 – 76 Hz
31 – 76 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 76 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 76 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 76 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 65 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)
1 upstream, 2 downstream / USB 2.0	1 upstream, 2 downstream / USB 2.0	–	1 upstream, 2 downstream / USB 2.0	1 upstream, 2 downstream / USB 2.0
–	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers
–	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack
AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
45 W (typical), 90 W (maximum)	40 W (typical), 95 W (maximum)	27 W (typical), 58 W (maximum)	36 W (typical), 90 W (maximum)	32 W (typical), 90 W (maximum)
Less than 0.9 W	Less than 1.5 W	Less than 0.7 W	Less than 1.5 W	Less than 1.5 W
174 mm	157 mm	157 mm	174 mm	174 mm
30° Up, 0° Down / 172° Right, 172° Left / 90°	30° Up, 0° Down / 172° Right, 172° Left / 90°	30° Up, 0° Down / 172° Right, 172° Left / 90°	30° Up, 0° Down / 172° Right, 172° Left / 90°	30° Up, 0° Down / 172° Right, 172° Left / 90°
With Stand: 511 × 347.5 – 521.5 × 240.5 – 256 mm; Without Stand: 511 × 333 × 85 mm	With Stand: 566 × 381.5 – 538.5 × 242 – 256 mm; Without Stand: 566× 367 × 85 mm	With Stand: 566 × 381.5 – 538.5 × 242 – 256 mm; Without Stand: 566× 367× 85 mm	With Stand: 511 × 347.5 – 521.5 × 240.5 – 256 mm; Without Stand: 511 × 333 × 85 mm	With Stand: 511 × 347.5 – 521.5 × 240.5 – 256 mm; Without Stand: 511 × 333 × 85 mm
With Stand: 9.6 kg; Without Stand: 6.6 kg	With Stand: 10.2 kg; Without Stand: 7.2 kg	With Stand: 10.2 kg; Without Stand: 7.2 kg	With Stand: 9.6 k; Without Stand: 6.6 kg	With Stand: 9.6 kg; Without Stand: 6.6 kg
•	•	•	•	•
•	•	•	•	•
–	–	–	–	–
–	–	–	–	–
Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge, normal)	Clock, Phase, Position, Range (Auto), Signal Filter, Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Signal Filter, Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Signal Filter, Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Signal Filter, Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity
Brightness, Contrast, Independent 6-Color Control, Gamma, Temperature, Saturation, Hue, Gain, Contrast and Outline Enhancer, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset
Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Eco Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer	Power Save (VESA DPM, DisplayPort Rev. 1.1a, and DVI DMPM), Off Timer
–	Volume, Power Save, Source (DisplayPort)	Volume	Volume, Power Save, Source (DisplayPort)	Volume, Power Save, Source (DisplayPort)
Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Auto Sharpness, Mode Preset, Adjustment Lock, DDC/CI Lock, Languages (English, German, French, Italian, Japanese, Simplified Chinese, Spanish, Swedish, Traditional Chinese), Power Indicator, All Reset	Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, DVI Input Level, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, DVI Input Level, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, DVI Input Level, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, DVI Input Level, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset
Color Mode (Text, Picture, Movie, sRGB, User1, User2, User3), Auto Fine Contrast[1]	Fine Contrast (EyeCare, Text, Picture, Movie, sRGB, Custom), Auto Fine Contrast[1]	Fine Contrast (Text, Picture, Movie, sRGB, Custom), Auto Fine Contrast[1]	Fine Contrast (EyeCare, Text, Picture, Movie, sRGB, Custom), Auto Fine Contrast[1]	Fine Contrast (EyeCare, Text, Picture, Movie, sRGB, Custom), Auto Fine Contrast[1]
•	–	–	–	–
•	•	•	•	•
•	•	–	•	•
Black	Gray, Black	Gray, Black	Gray, Black	Gray, Black
CUDO certified mark, TCO'03, TÜV/Ergonomics (including ISO 9241-307), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.0, EPEAT Silver (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.0, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R
AC power cord, signal cables (DVI-D – DVI-D, DVI-I – D-Sub mini 15 pin), USB cable, setup guide, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD, EIZO ScreenSlicer software), warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [USB], ScreenSlicer software), setup guide, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ICC Profile, ScreenSlicer software), setup guide, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [USB], ScreenSlicer software), setup guide, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [USB], ScreenSlicer software), setup guide, warranty card
Five Years[2]	Five Years[2]	Five Years[2]	Five Years[2]	Five Years[2]

FlexScan S2202W	FlexScan S2100	FlexScan S1932	FlexScan S1921-X
22" / 56 cm (558 mm diagonal)	21.3" / 54 cm (540 mm diagonal)	19" / 48 cm (481 mm diagonal)	19" / 48 cm (481 mm diagonal)
473.8 × 296.1 mm	432 × 324 mm	376 × 301 mm	376 × 301 mm
TN	VA (with overdrive circuit)	VA (with overdrive circuit)	VA
170°, 160° (at contrast ratio of 10:1) 178°, 178° (at contrast ratio of 5:1)	178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)
300 cd/m^2	300 cd/m^2	250 cd/m^2	250 cd/m^2
1000:1	1000:1	1000:1 (2500:1 dynamic contrast)	1000:1
Gray-to-gray: – , black-white-black: 5 ms	Gray-to-gray: 8 ms, black-white-black: 16 ms	Gray-to-gray: 8 ms, black-white-black: 20 ms	Black-white-black: 20 ms
1680 × 1050 (16:10 aspect ratio)	1600 × 1200 (4:3 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)
0.282 × 0.282 mm	0.270 × 0.270 mm	0.294 × 0.294 mm	0.294 × 0.294 mm
8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors
–	–	–	–
•	•	•	•
• (with HDCP support)	–	• (with HDCP support)	• (with HDCP support)
–	•	–	–
–	–	–	–
–	–	–	–
31 – 82 kHz, 55 – 76 Hz	24 – 80 kHz, 49 – 76 Hz	24.8 – 80 kHz, 50 – 75 Hz	31 – 80 kHz, 50 – 75 Hz
31 – 65 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 76 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)
–	1 upstream, 2 downstream / USB 2.0	1 upstream / USB 2.0	–
0.5 W + 0.5 W speakers	–	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers
3.5 mm stereo jack / 3.5 mm headphone jack	–	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack
AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
23 W (typical), 51 W (maximum)	33 W (typical), 70 W (maximum)	24 W (typical), 45 W (maximum)	22 W (typical), 40 W (maximum)
Less than 0.7 W	Less than 2 W	Less than 0.8 W	Less than 0.6 W
100 mm	82 mm	100 mm	With Stand: 100 mm
30° Up, 0° Down / 35° Right, 35° Left / 90°	40° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°
With Stand: 507 × 406 – 506 × 205 mm; Without Stand: 507 × 333 × 74 mm	With Stand: 465 × 453 – 535 × 208.5 mm; Without Stand: 465 × 361 × 64 mm	With Stand: 405 × 406.5 – 506.5 × 205 mm; Without Stand: 405 × 334 × 61.5 mm	With Stand: 405 × 406.5 – 506.5 × 205 mm; Without Stand: 405 × 334 × 61.5 mm
With Stand: 7.7 kg; Without Stand: 5.8 kg	With Stand: 9.7 kg; Without Stand: 6.7 kg	With Stand: 7.2 kg; Without Stand: 5.2 kg	With Stand: 7.2 kg; Without Stand: 5.2 kg
•	•[1]	•[1]	•
•	–	–	•
–	–	–	–
–	–	–	–
Clock, Phase, Position, Range (Auto), Signal Filter, Smoothing (5 stages)	Clock, Phase, Position, Resolution, Range (Auto), Signal Filter, Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (Auto), Sharpness	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)
Brightness, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Contrast, Temperature, Gain, Reset, Saturation, Hue, Gamma, ContrastEnhancer	Brightness, Contrast, Temperature, Gain, Reset
Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer
Volume, Power Save	–	Volume	Volume
Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, DVI Input Level, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Settings, Input Priority, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, BrightRegulator, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Power Indicator, Reset	Signal Settings, Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), BrightRegulator, Power Indicator, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Power Indicator, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Position, Adjustment Lock, DDC/CI Lock, Sync on Green, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset
Fine Contrast (Text, Picture, Movie, sRGB, Custom), Auto Fine Contrast[2]	Fine Contrast (Text, Picture, Movie, sRGB, Custom), Auto Fine Contrast[2]	Fine Contrast (Text, Picture, Movie, CAD, sRGB, Custom), Auto Fine Contrast[2]	Fine Contrast (Text, sRGB, EyeCare, Paper, Custom), Auto Fine Contrast[2]
–	–	–	–
•	•	•	•
–	•	•	–
Gray, Black	Gray, Black	Gray, Black	Gray, Black
TCO Displays 5.0, EPEAT Silver (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, CCC, GOST-R	TCO'03, TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R
AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), audio cable, EIZO LCD Utility Disk (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ICC Profile, ScreenSlicer software), setup guide, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub mini 15 pin – D-Sub mini 15 pin), USB cable, EIZO LCD Utility Disk (HTML user's manual, ScreenManager Pro for LCD [USB], ICC Profile), warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), USB cable, audio cable, setup manual, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [USB], ICC profiles), 4 screws for mount option, warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ScreenSlicer software), 4 screws for mount option, warranty card
Five Years[3]	Five Years[3]	Five Years[3]	Five Years[3]

SPECIFICATIONS

		FlexScan S1902	FlexScan S1721-X	FlexScan S1701-X	FlexScan S1501-B
Panel	**Size**	19" / 48 cm (481 mm diagonal)	17" / 43 cm (432 mm diagonal)	17" / 43 cm (432 mm diagonal)	15" / 38 cm (380 mm diagonal)
	Display Size (H × V)	376 × 301 mm	338 × 270 mm	338 × 270 mm	304.1 × 228.1 mm
	Type	TN	VA	TN	TN
	Viewing Angles (H, V)	170°, 160° (at contrast ratio of 5:1)	178°, 178° (at contrast ratio of 10:1)	160°, 160° (at contrast ratio of 10:1)	160°, 130° (at contrast ratio of 10:1)
	Brightness	250 cd/m²	250 cd/m²	300 cd/m²	250 cd/m²
	Contrast Ratio	1000:1	1500:1	1000:1	700:1
	Response Time (Typical)	Black-white-black: 5 ms	Black-white-black: 25 ms	Black-white-black: 5 ms	Gray-to-gray: – , black-white-black: 8 ms
	Native Resolution	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1024 × 768 (4:3 aspect ratio)
	Pixel Pitch	0.294 × 0.294 mm	0.264 × 0.264 mm	0.264 × 0.264 mm	0.297 × 0.297 mm
	Maximum Display Colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.19 million colors
	Wide Gamut Coverage	–	–	–	–
Video and USB	**D-Sub mini 15 pin**	•	•	•	•
	DVI-D 24 pin	• (with HDCP support)	• (with HDCP support)	• (with HDCP support)	•
	DVI-I 29 pin	–	–	–	–
	DisplayPort	–	–	–	–
	Analog Scan. Freq. (H, V)	31 – 80 kHz, 50 – 75 Hz	31 – 80 kHz, 50 – 75 Hz	31 – 80 kHz, 50 – 75 Hz	24.8 – 60 kHz, 55 – 75 kHz
	Digital Scan. Freq. (H, V)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 49 Hz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)
	USB Ports / Standard	–	–	–	–
Audio	**Speakers**	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers	0.5 W + 0.5 W speakers
	Input / Output Terminals	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack
Power	**Power Requirements**	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
	Power Consumption	15 W (typical), 30 W (maximum)	19 W (typical), 38 W (maximum)	19 W (typical), 38 W (maximum)	12 W (typical), 25 W (maximum)
	Power Save Mode	Less than 0.6 W	Less than 0.6 W	Less than 0.6 W	Less than 1 W
Physical Specifications	**Height Adj. Range**	With Stand: 100 mm	With Stand: 100 mm	With Stand: 100 mm	–
	Tilt / Swivel / Pivot	30° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / 90°	30° Up, 0° Down / 35° Right, 35° Left / –
	Dimensions	With Stand: 405 × 406.5 – 506.5 × 205 mm; Without Stand: 405 × 334 × 61.5 mm	With Stand: 363 × 389.5 – 489.5 × 205 mm; Without Stand: 363 × 300 × 59 mm	With Stand: 363 × 389.5 – 489.5 × 205 mm; Without Stand: 363 × 300 × 59 mm	With Stand: 346 × 325 × 175 mm; Without Stand: 346 × 280 × 69 mm
	Net Weight	With Stand: 7.2 kg; Without Stand: 5.2 kg	With Stand: 5.9 kg; Without Stand: 3.9 kg	With Stand: 5.9 kg; Without Stand: 3.9 kg	With Stand: 5.3 kg; Without Stand: 3.7 kg
EcoView Features	**Auto EcoView**	•	•	•	–
	EcoView Index	•	•	•	–
	EcoView Sense	–	–	–	–
	EcoView Optimizer	–	–	–	–
OSD Adjustment Functions	**Screen Adjustment**	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)
	Color Adjustment	Brightness, Contrast, Temperature, Gain, Reset	Brightness, Contrast, Temperature, Gain, Reset	Brightness, Contrast, Temperature, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Gain, Reset
	Power Management	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM), Off Timer
	Sound	Volume	Volume	Volume	Volume
	Other Settings	Signal Switching, Power Indicator, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Position, Adjustment Lock, DDC/CI Lock, Sync on Green, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Power Indicator, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Position, Adjustment Lock, DDC/CI Lock, Sync on Green, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Power Indicator, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Position, Adjustment Lock, DDC/CI Lock, Sync on Green, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Power Indicator, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Position, Bright-Regulator, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset, DDC/CI Lock
Other Features	**Preset Modes**	Fine Contrast (Text, sRGB, EyeCare, Paper, Custom), Auto Fine Contrast[2]	Fine Contrast (Text, sRGB, EyeCare, Paper, Custom), Auto Fine Contrast[2]	Fine Contrast (Text, sRGB, EyeCare, Paper, Custom), Auto Fine Contrast[2]	Text, sRGB, Custom
	Digital Uniformity Equal.	–	–	–	–
	ScreenManager Pro for LCD	•	•	•	•
	ScreenTuner	–	–	–	–
General	**Available Cabinet Colors**	Gray, Black	Gray, Black	Gray, Black	Gray, Black
	Certifications and Standards	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 9241-307), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TÜV/Ergonomics (including ISO 13406-2), TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE, CCC, GOST-R
	Supplied Accessories	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ScreenSlicer software), 4 screws for mount option, warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ScreenSlicer software), 4 screws for mount option, warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), audio cable, setup guide, CD-ROM (PDF user's manual, ScreenManager Pro for LCD [DDC/CI], ScreenSlicer software), 4 screws for mount option, warranty card	AC power cord, signal cables (D-Sub – D-Sub, DVI-D – DVI-D), USB cable, audio cable, setup manual, CD-ROM (PDF user's manual, ICC profiles), 4 screws for mount option, warranty card
	Warranty	Five Years[3]	Five Years[3]	Five Years[3]	Five Years[3]

[1] This feature is called "BrightRegulator" in the OSD menu. [2] The bundled ScreenManager Pro for LCD is needed to activate Auto Fine Contrast. The USB version is compatible with Microsoft Windows 7/Vista/XP. The DDC/Ci version is compatible with 7/Vista. [3] The usage time is limited to 30,000 hours or less, and the warranty period of the LCD panel is limited to three years from the date of purchase.

Touch Panel

		FlexScan L761T-C FlexScan L760T-C	FlexScan L560T-CB	FlexScan T1721	FlexScan L363T-C FlexScan L362T
LCD Panel	**Size**	19" / 48 cm (481 mm diagonal)	17" / 43 cm (432 mm diagonal)	17" / 43 cm (432 mm diagonal)	15" / 38 cm (380 mm diagonal)
	Display Size (H × V)	376 × 301 mm	338 × 270 mm	338 × 270 mm	304 × 228 mm
	Type	VA	VA	TN	IPS
	Viewing Angles (H, V)	178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)	160°, 160° (at contrast ratio of 10:1)	170°, 170° (at contrast ratio of 10:1)
	Brightness	180 cd/m²	180 cd/m²	200 cd/m²	195 cd/m²
	Contrast Ratio	1000:1	1500:1	1000:1	450:1
	Response Time (Typical)	Gray-to-gray: – , black-white-black: 20 ms	Gray-to-gray: – , black-white-black: 25 ms	Gray-to-gray: – , black-white-black: 5 ms	Gray-to-gray: – , black-white-black: 55 ms
	Native Resolution	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1280 × 1024 (5:4 aspect ratio)	1024 × 768 (4:3 aspect ratio)
	Pixel Pitch	0.294 × 0.294 mm	0.264 × 0.264 mm	0.264 × 0.264 mm	0.297 × 0.297 mm
	Maximum Display Colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors
	Wide Gamut Coverage	–	–	–	–
Touch Panel	**Type**	Analog capacitive (finger touch)	Analog capacitive (finger touch)	Surface acoustic wave	Analog capacitive (finger touch)
	Optical Clarity	91.50%	91.50%	91%	84%
	Touch Life	225 million touches (minimum)	225 million touches (minimum)	50 million touches (minimum)	225 million touches (minimum)
	Compatible OS	Windows 7 32-bit and 64-bit; Windows Vista 32-bit; Windows XP 32-bit; Windows 2000	Windows 7 32-bit and 64-bit; Windows Vista 32-bit; Windows XP 32-bit; Windows 2000	Windows 7 32-bit and 64-bit; Windows Vista 32-bit; Windows XP 32-bit	Windows 7 32-bit and 64-bit; Windows Vista 32-bit; Windows XP 32-bit; Windows 2000
	Communication Protocol	L761T-C: USB; L760T-C: RS-232C	USB	USB	L363T-C: USB; L362T: RS-232C
Video and USB	**D-Sub mini 15 pin**	•	•	•	•
	DVI-D 24 pin	•	•	•	•
	DVI-I 29 pin	–	–	–	–
	DisplayPort	–	–	–	–
	Analog Scan. Freq. (H, V)	30 – 81 kHz, 49.5 – 75.5 kHz	30 – 81 kHz, 49.5 – 75.5 Hz	24.8 – 80 kHz, 50 – 75 Hz	24 – 61 kHz, 55 – 76 Hz
	Digital Scan. Freq. (H, V)	30 – 65 kHz, 59 – 61 Hz (VGA Text: 70 Hz)	30 – 65 kHz, 59 – 61 Hz (VGA Text: 70 Hz)	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	31 – 49 kHz, 59 – 61 Hz (VGA Text: 70 Hz)
	USB Ports / Standard	–	–	1 upstream / USB 2.0	–
Audio	**Speakers**	–	–	0.5 W + 0.5 W speakers	1 W + 1 W speakers
	Input / Output Terminals	–	–	3.5 mm stereo jack	3.5 mm stereo jack
Power	**Power Requirements**	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
	Power Consumption	40 W (maximum)	35 W (maximum)	34 W (maximum)	40 W (maximum)
	Power Save Mode	–	–	Less than 2.6 W	Less than 3 W
Physical Specifications	**Height Adj. Range**	82 mm	82 mm	104 mm	–
	Tilt / Swivel / Pivot	40° Up, 0° Down / 35° Right, 35° Left	40° Up, 0° Down / 35° Right, 35° Left	60° Up, 5° Down / – / –	30° Up, 3° Down / –
	Dimensions	With Stand: 414 × 442.5 – 524.5 × 208.5 mm; Without Stand: 414 × 340 × 64 mm	With Stand: 380 × 432.5 – 514.5 × 208.5 mm; Without Stand: 380 × 353 × 58 mm	With Stand: 380 × 280 – 415 × 200 – 335 mm Without Stand: 380 × 353 × 58 mm	With Stand: 346 × 369 × 157 mm; Without Stand: 346 × 301 × 54.5 mm
	Net Weight	With Stand: 9.0 kg; Without Stand: 6.0 kg	With Stand: 8.2 kg; Without Stand: 5.2 kg	With Stand: 7.0 kg, Without Stand: 5.2 kg	With Stand: 5 kg; Without Stand: 4.1 kg
EcoView Features	**Auto EcoView**	–	–	•	–
	EcoView Index	–	–	•	–
	EcoView Sense	–	–	–	–
	EcoView Optimizer	–	–	–	–
OSD Adjustment Functions	**Screen Adjustment**	Clock, Phase, Position, Range (RGB), Smoothing (5 stages)	Clock, Phase, Position, Range (RGB), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Smoothing (5 stages)	Clock, Phase, Position, Range (RGB), Smoothing (5 stages)
	Color Adjustment	Brightness, Gamma, Temperature, Saturation, Hue, Gain, Reset	Brightness, Gamma, Temperature, Gain, Reset	Brightness, Contrast, Gamma, Temperature, Gain, Reset	Brightness, Gamma, Temperature, Saturation, Hue, Gain, Reset
	Power Management	Off Timer	Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer
	Sound	–	–	Volume	Volume
	Other Settings	Signal Settings, VGA Selection, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Reset	Signal Settings, VGA Selection, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Reset	Signal Settings, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Settings, VGA Selection, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Spanish, Swedish), Sound (volume, mute), Reset
Other Features	**Preset Modes**	sRGB, Custom	sRGB, Custom	sRGB, Custom, EyeCare, Text	sRGB, Custom
	Digital Uniformity Equal.	–	–	–	–
	ScreenManager Pro for LCD	–	–	–	–
	ScreenTuner	–	–	–	–
General	**Available Cabinet Colors**	Gray, Black	Gray, Black	Gray, Black	Gray, Black
	Certifications and Standards	TÜV/GM (EN60601-1), CE Medical Device Directive, CB (IEC60601-1), cTÜVus (UL60601-1, CSA C22.2 No. 601-1), FCC-B, Canadian ICES-003-B, VCCI-B, CCC	TÜV/GM (EN60601-1), c-Tick, CE Medical Device Directive, CB (IEC60601-1), cTÜVus (UL60601-1, CSA C22.2 No. 601-1), FCC-B, Canadian ICES-003-B, VCCI-B, CCC, GOST-R	EPEAT Silver (US), c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R	TÜV/GM (EN60601-1), c-Tick, CE Medical Device Directive, CB (IEC60601-1), cTÜVus (UL60601-1, CSA C22.2 No. 601-1), FCC-B, Canadian ICES-003-B, VCCI-B, CCC
	Supplied Accessories	AC power cord, user's manual, signal cable (D-Sub mini 15 pin), USB cable, quick reference, CD-ROM (touch panel driver and user's manual), warranty card	AC power cord, user's manual, signal cable (D-Sub mini 15 pin), USB cable, quick reference, CD-ROM (touch panel driver and user's manual), warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, EIZO LCD Utility Disk (PDF user's manual, touch panel driver), setup guide, 4 screws for mount option, warranty card	AC power cord, signal cable (D-Sub mini 15 pin), audio cable, USB cable (L363T-C), touch panel cable (L362T), user's manual, CD-ROM (touch panel driver), 4 screws for mount option, warranty card
	Warranty	Three Years	Three Years	Three Years	Three Years

[1] *This feature is called "BrightRegulator" in the OSD menu.*

FlexScan T1502-B FlexScan T1501-B	FlexScan T2351W	FlexScan T1751
15" / 38 cm (380 mm diagonal)	23" / 58 cm (584 mm diagonal)	17" / 43 cm (432 mm diagonal)
304 × 228 mm	509.8 × 286.7 mm	338 × 270 mm
TN	VA (with overdrive circuit)	VA
160°, 130° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)	178°, 178° (at contrast ratio of 10:1)
195 cd/m^2	265 cd/m^2	180 cd/m^2
700:1	3000:1	1500:1
Gray-to-gray: – , black-white-black: 8 ms	Gray-to-gray: 7 ms, black-white-black: 25 ms	Gray-to-gray: – , black-white-black: 25 ms
1024 × 768 (4:3 aspect ratio)	1920 × 1080 (16: 9 aspect ratio)	1280 × 1024 (5:4 aspect ratio)
0.297 × 0.297 mm	0.2655 × 0.2655 mm	0.264 × 0.264 mm
8-bit display, 16.19 million colors	8-bit display, 16.77 million colors	8-bit display, 16.77 million colors
–	–	–
Analog resistive	Infrared Optical Imaging	Infrared Optical Imaging
80%	88%	–
10 million touches (minimum)	–	–
Windows 7 32-bit; Windows Vista 32-bit; Windows XP 32-bit; Windows 2000	Multi-touch: Windows 7 32-bit and 64-bit Single-touch: Windows Vista 32-bit and 64-bit	Multi-touch: Windows 7 32-bit and 64-bit Single-touch: Windows Vista 32-bit and 64-bit
T1502-B: USB; T1501-B: RS-232C	USB	USB
•	•	•
•	• (with HDCP support)	• (with HDCP support)
–	–	–
–	–	–
24.8 – 60 kHz, 55 – 75 kHz	31 – 81 kHz, 55 – 76 Hz	24.8 – 80 kHz, 50 – 75 Hz
31 – 49 Hz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)	HDMI: 15 – 68 kHz, 49 – 61 Hz (VGA Text: 69 – 71 Hz); DVI: 31 – 68 kHz, 59 – 61 Hz	31 – 64 kHz, 59 – 61 Hz (VGA Text: 69 – 71 Hz)
–	1 upstream / USB 2.0	1 upstream / USB 2.0
0.5 W + 0.5 W speakers	0.35 W speaker	0.5 W + 0.5 W speakers
3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack / 3.5 mm headphone jack	3.5 mm stereo jack
AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz	AC 100 – 120 V / 200 – 240 V, 50 / 60 Hz
25 W (maximum)	26 W (typical), 42 W (maximum)	34 W (maximum)
Less than 1 W	Less than 1.3 W	Less than 1.2 W
–	–	–
30° Up, 0° Down / 35° Right, 35° Left / –	15°, 25°, 35°, 45°, 55°, 65° / – / –	15°, 25°, 35°, 45°, 55°, 65° / – / –
With Stand: 346 × 379.5 × 175 mm; Without Stand: 346 × 280 × 69 mm	With Stand: 557 × 204.5 – 375.5 × 194 – 367 mm; Without Stand: 557 × 367 × 68 mm	With Stand: 392 × 199 – 366 × 191 – 360 mm; Without Stand: 392 × 357 × 66.5 mm
With Stand: 6.1 kg; Without Stand: 4.1 kg	With Stand: 7.6 kg; Without Stand: 6.8 kg	With Stand: 5.3 kg; Without Stand: 4.5 kg
•[1]	•	•
–	•	–
–	–	–
–	–	–
Clock, Phase, Position, Range (Auto/RGB), Smoothing (5 stages)	Clock, Phase, Position, Range (Auto), Screen Size (full screen, enlarge, normal), Smoothing (5 stages), Border Intensity	Clock, Phase, Position, Range (RGB), Smoothing (5 stages)
Brightness, Contrast, Gamma, Temperature, Gain, Reset	Brightness, Black Level, Contrast, Gamma, Temperature, Saturation, Hue, Gain, Power Resolution, Overdrive, Reset	Brightness, Contrast, Temperature, Gain, Reset
Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer	Power Save (VESA DPM and DVI DMPM), Off Timer
Volume	Volume, Power Save, Source (HDMI)	Volume
Signal Settings, Power Indicator, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Position, BrightRegulator, Adjustment Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Reset	Signal Switching, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, HDMI Color Space, Adjustment Lock, DDC/CI Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset	Signal Settings, Product Information (name, serial number, resolution, operating time, etc.), OSD Menu Settings, Adjustment Lock, DDC/CI Lock, Languages (English, French, German, Italian, Japanese, Simplified and Traditional Chinese, Spanish, Swedish), Power Indicator, Reset
Text, sRGB, Custom	Game, Cinema, Paper, sRGB, User1, User2, Auto Fine Contrast[1]	sRGB, Custom, EyeCare, Text
–	–	–
–	•	•
–	–	–
Gray, Black	Gray - Black Two Tone, Black	Gray - Black Two Tone, Black
TÜV/GS, C-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, RoHS, WEEE, CCC, GOST-R	TCO Displays 5.1, EPEAT Gold (US), c-Tick, CE, CB, cTÜVus, FCC-B, Canadian ICES-003-B, TÜV/S, VCCI-B, EPA Energy Star, RoHS, WEEE	EPEAT Silver (US), TÜV/GM (EN60601-1), c-Tick, CE Medical Device Directive, CB (IEC60601-1), cTÜVus (UL60601-1, CSA C22.2 No. 601-1), FCC-B, Canadian ICES-003-B, VCCI-B, EPA Energy Star, RoHS, WEEE, CCC, GOST-R
AC power cord, user's manual, signal cable (D-Sub mini 15 pin), touch panel cable (T1502-B / USB, T1501-B / RS-232C), audio cable, CD-ROM (touch panel driver and user's manual), setup guide, 4 screws for mount option, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, touch pen, cleaning cloth, EIZO LCD Utility Disk (PDF user's manual, touch panel driver), setup guide, 4 screws for mount option, warranty card	AC power cord, signal cables (DVI-D – DVI-D, D-Sub – D-Sub), USB cable, audio cable, touch pen, EIZO LCD Utility Disk (PDF user's manual, touch panel driver), setup guide, warranty card
Three Years	Three Years	Three Years

ACCESSORIES

Mounting Solutions

Wall Mount Arms

LA-030-W

LA-011-W

EIZO offers two options for mounting your monitor on a wall. The LA-030-W is a 3-axes arm with tilt, swivel, and rotation for portrait mode. It can be extended more than 500 mm away from or placed against the wall when not in use. The LA-011W is a single-axis arm with a minimum profile and tilt/swivel.

Supported Monitors: EV2335W, SX2462W, SX2262W, S2433W, S2402W, S2243W, S2233W, S2202W, S2100, S1932, S1921-X, S1902

Dual Height Adjustable Stand

LS-HM1-D

Mount two monitors in either portrait or landscape orientation. Height is adjustable in six stages and cable housing in the back of the stand contributes to a clutter-free desktop.

Supported Monitors: S2100, S1932, S1921-X, S1902, S1721-X, S1701-X, S1501-B

Other Accessories

Monitor Hoods

These hoods reduce glare by shielding the screen from ambient light.

Supported Monitors: SX2762W, SX2462W, S2100

Color Matching Tool

EIZO EasyPIX lets professionals in graphic design, CAD animation, and digital photography get predictable color through hardware calibration. It can also be used by amateur SLR camera enthusiasts as a simple way to match colors between their monitors and photo prints. With the EasyPIX software you can match the monitor's color and brightness with that of the photo paper and then create a monitor profile with the bundled color sensor. No expertise in color management is required and the profile can be shared with image retouching software to ensure accurate results when printing.

Supported Monitors: SX2762W, SX2462W, SX2262W, S2433W, S2243W, S2233W, T2351W (T2351W is compatible with Windows 7/Vista/XP only. Other monitors are also compatible with the Mac OS X 10.4.11 and above.)

Utility Software

EIZO ScreenSlicer

This is a free software utility that lets you more effectively use your screen through partitioning. Simply drop your windows into configurable partitioned areas and they will be aligned instantly.

ScreenSlicer is compatible with all FlexScan LCD monitors and available from www.eizo.com.

Software windows aligned in partitioned areas.

ScreenManager Pro for LCD and ScreenTuner

Developed for Windows and Mac OSes respectively, these two free applications let you adjust your monitor's color with your mouse rather than the OSD menu buttons. With ScreenManager Pro for LCD you can also set the off timer, adjust speaker volume, and assign a preset mode to a specific application so that mode becomes active whenever the application is in use.

Available from www.eizo.com. See pages 8-13 for compatibility information.

EIZO NANAO CORPORATION
153 Shimokashiwano, Hakusan, Ishikawa 924-8566 Japan
Phone +81-76-277-6792 Fax: +81-76-277-6793
www.eizo.com

© 2011 Eizo Nanao Corporation
All product names and logos are trademarks or registered trademarks of their respective companies. EIZO ScreenSlicer, EIZO EasyPIX, and EIZO EcoView NET are trademarks, and ScreenManager, FlexScan, and EIZO are registered trademarks of Eizo Nanao Corporation.
Specifications are subject to change without notice.
(110904) Printed in Japan, 9, 2011, 4K